

**INSTALLATION
INSTRUCTIONS**

Accessory

**LEATHER SHIFT KNOB (M/T)
P/N 08U92-SDA-100A**

Application

**2005 ACCORD
2- AND 4-DOOR**

Publications No.

All 27460

Issue Date

AUG 2004**PARTS LIST**


Leather shift knob

**TOOLS REQUIRED**


Long nose pliers

INSTALLATION


1. Squeeze the ring while you pull down on the shift boot. Remove the shift knob by turning it counterclockwise.

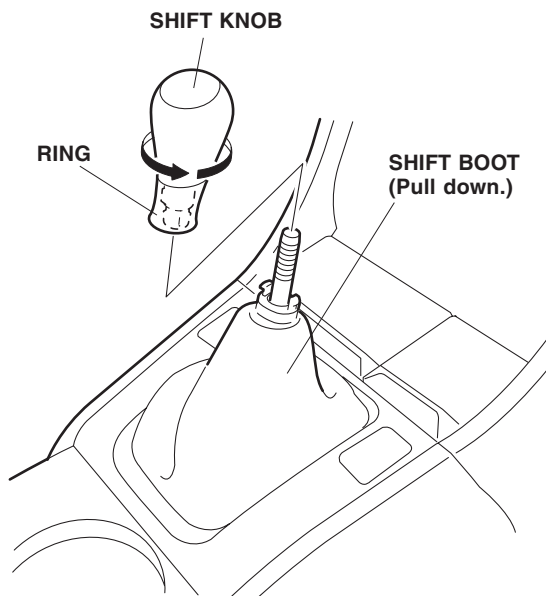


2. Remove the shift knob from the ring by squeezing the retaining tabs and pushing it up with long nose pliers.

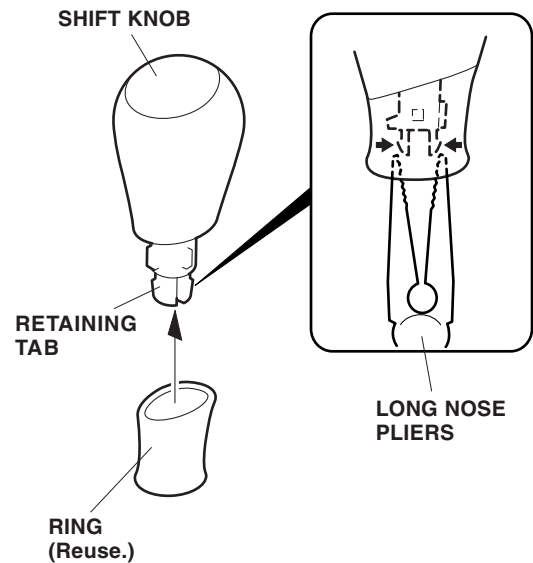

3. Transfer the ring to the leather shift knob.

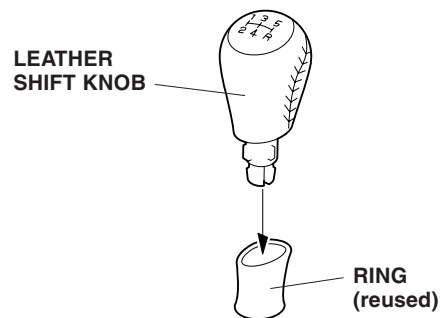

4. Install the leather shift knob on the shift lever by turning it in the clockwise direction.

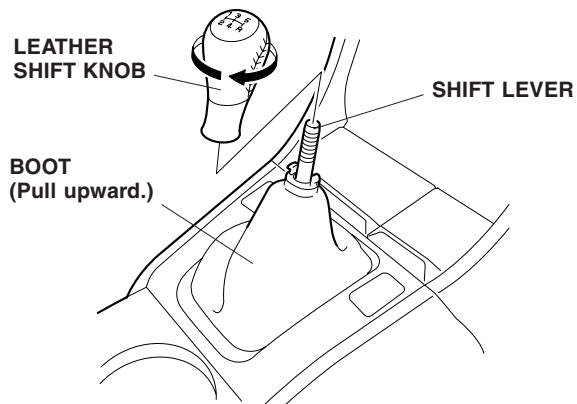

5. Pull the boot upward.

USE AND CARE

- Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the shift knob.
- Rinse the knob completely with water, then dry it with a shop towel.
- Never use organic solvents such as benzene, thinner, or gasoline to clean the shift knob.