



# INSTALLATION INSTRUCTIONS

Accessory

**ALUMINUM WHEEL  
P/N 08W18-SNX-100**

Application

**2007 CIVIC Si**

Publications No.


**All 33641**

Issue Date


**SEP 2006**

## PARTS LIST


Aluminum wheel

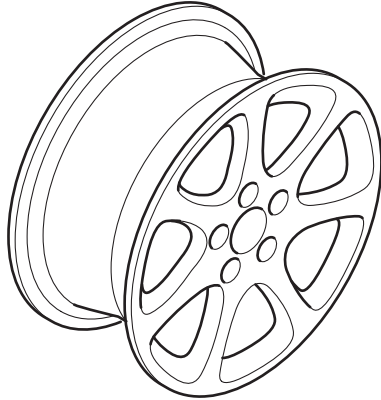


Center cap




Tire valve



Tire pressure caution label



Supplemental Information



## TOOLS AND SUPPLIES REQUIRED

Isopropyl alcohol

Shop towel

## SPECIFICATIONS

### Coupe Si:

Rim size	18 x 7 J (offset 45)	
Tire size	215/40ZR18 85W 215/40ZR18 89W	
Bolt hole PCD	114.3 (5 holes)	
Tire pressure	Front	36 psi (250 kPa, 2.5 kgf/cm <sup>2</sup> )
	Rear	36 psi (250 kPa, 2.5 kgf/cm <sup>2</sup> )


## IMPORTANT MESSAGE

For your safety and safety of others, be sure to install the aluminum wheels properly as described in this Installation Instruction. Failure to install the aluminum wheels proper can cause serious accident, injury or even death.

## INSTALLATION

### NOTE:

- The illustration of the aluminum wheels shown in these instructions are for reference purpose only and may differ from those used with the actual vehicle.
  - Make sure to install the tires of the correct size.
  - Follow the instructions described in the Owner's Manual when jacking up the car and removing and installing the wheels. Do not overtighten the wheel nuts by placing your weight on the wrench or by using a pipe for added leverage.  
Wheel nut torque: 108 N·m (80 lb-ft)
  - Use a tire changer to install and remove the tires on and from the aluminum wheels as described in the Operation Manual furnished with the tire changer. Do not use tire lever to install and remove the tires on and from the aluminum wheels as it may cause damage to the tire and aluminum wheel.
1. Open the driver's side door. Using isopropyl alcohol, thoroughly clean the area where the Tire Pressure Caution Label will attach. Remove the adhesive backing from the label and attach it on the vehicle caution label as shown.

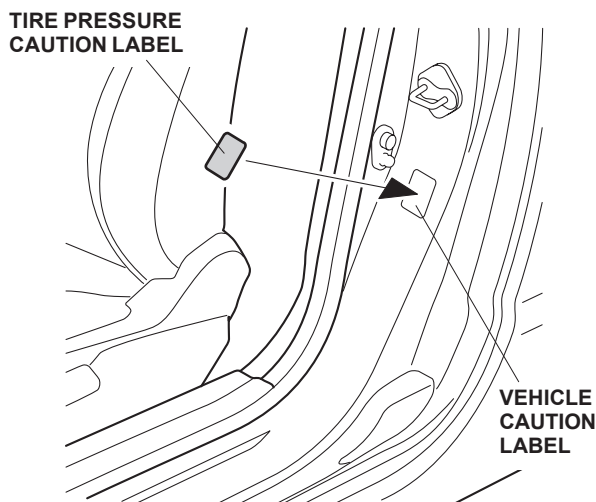

2. Attach the "Supplemental Information" page included in this kit to the Owner's Manual. For the method of attaching the page, refer to "To the dealer:" attached to the "Supplemental Information" page.

Be sure to explain the contents of the "Supplemental Information" when delivering the car to your customer.