



INSTALLATION INSTRUCTIONS

Accessory

16" ALUMINUM WHEEL
P/N 08W16-SNA-100-A

Application

2009 CIVIC
2-AND 4-DOOR

Publications No.


All 40106

Issue Date


AUG 2008

PARTS LIST

Aluminum wheel
(The illustration may differ from the actual wheel.)



Center cap



Grommet



TOOLS AND SUPPLIES REQUIRED

Ratchet
11 mm Socket
Torque wrench
Isopropyl alcohol
Shop towel
HDS (Honda Diagnostic System)
Snap-on TPMS sensor system initializer tool

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE:


- This aluminum wheel is designed for use on vehicles with TPMS (Tire Pressure Monitoring System).
- This aluminum wheel is equipped with a TPMS sensor. See the service manual for tire replacement procedure and TPMS sensor installation procedure.
- The illustration of the aluminum wheels are shown for reference purposes only.
- Install the correct size tire.
- Use a tire changer to remove and install the tires. Using a tire lever can damage the tire, the wheel, and the TPMS sensor.
- The wheel nut torque is 108 N·m (80 lb-ft).
- Standard wheel nuts should not be used with the aluminum wheels. Replace them with the correct wheel nuts, which are sold separately.

for wheels with cap

for aluminum wheels

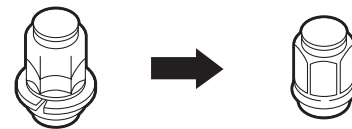


1. Remove the valve stem nut and washer, then remove the tire pressure sensor from the wheel.

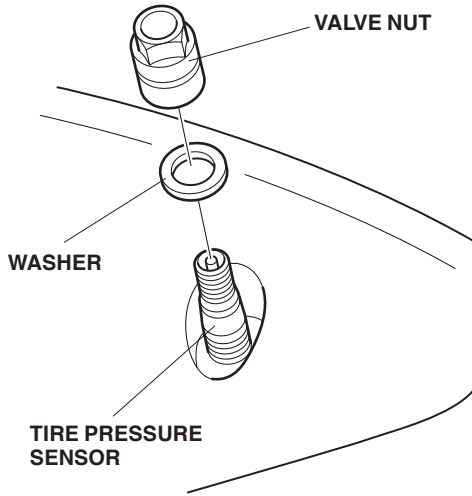

2. Remove and discard the grommet from the tire pressure sensor.


NOTE: If the grommet is missing from the tire pressure sensor, make sure it is not stuck in the wheel.

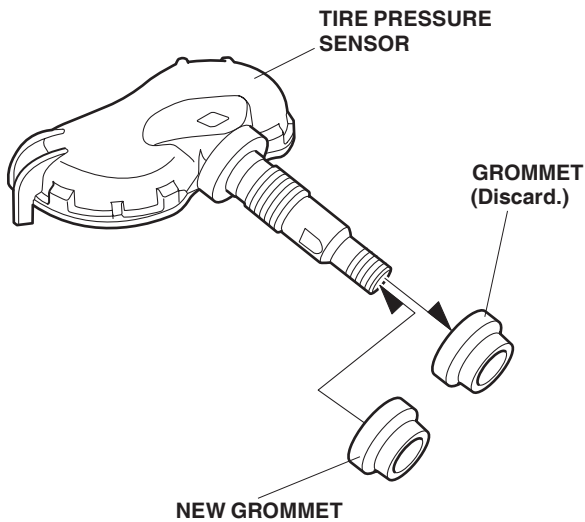

3. Install the new grommet onto the tire pressure sensor.
4. Clean the mating surface and the valve hole of the aluminum wheel.

5. Install the tire pressure sensor and the washer to the aluminum wheel, and loosely install the valve nut. Make sure the sensor is resting on the wheel.

NOTE: Install the tire pressure sensor so that the sensor housing surface does not exceed the wheel protrusion.

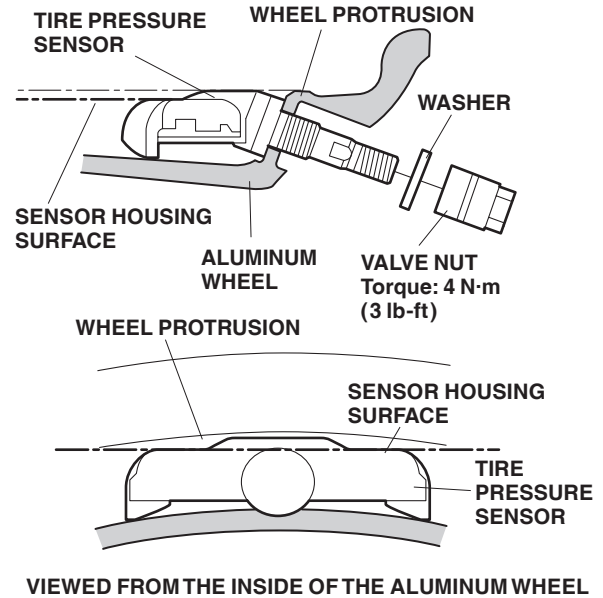

6. Torque the valve nut to 4 N·m (3 lb-ft) while holding the tire pressure sensor toward the wheel.

NOTE:

- Do not reuse a torqued grommet, or the valve stem may leak.
 - Do not use pneumatic or electric tools on the valve nut.
7. Install the tires according to the instructions in the service manual.
 8. Install the wheels on the vehicle and torque the the wheel nuts to 108 N·m (80 lb-ft).

TIRE PRESSURE SENSOR LOCATIONS

- Using the HDS and the Snap-on TPMS sensor initializer tool, register the TPMS sensor locations in order of ①, ②, ③, and ④ according to "Tire Pressure Sensor Location" in the Service Manual.

