



INSTALLATION INSTRUCTIONS

Accessory
**CD CHANGER
 (TRUNK MOUNT)**

Application
**2011 CIVIC
 4-DOOR
 (VP, LX, LX-S, EX, EX-L)**


Publications No.
All 44385

Issue Date
AUG 2010


PARTS LIST

**CD Changer Attachment (Sold Separately)
 P/N 08B26-SNA-101**

CD changer bracket

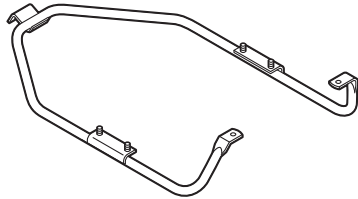


2 Side brackets



3 Clip nuts



3 EPT seals




3 Washer-bolts




4 Flange nuts




15 Wire ties




2 Wire ties with clip



8 Cushion tapes



Bus cable




4 Washer-screws




**CD Changer Kit (Sold Separately)
 P/N 08A26-5E1-101**


CD changer

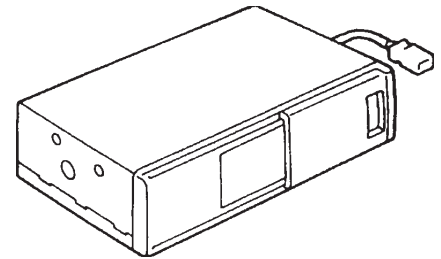

Bracket (Not Used)



8-Disc CD magazine



8 Washer-screws, 4 x 6 mm




Accessory User's Information Manual



TOOLS REQUIRED

Phillips screwdriver
Flat-tip screwdriver
Stubby Phillips screwdriver
10 mm combination wrench
Clip remover
8 mm and 10 mm Sockets
Ratchet
Small flat-tip screwdriver
Contact cleaner
Shop towel

Illustration of the CD Changer Installed on the Vehicle

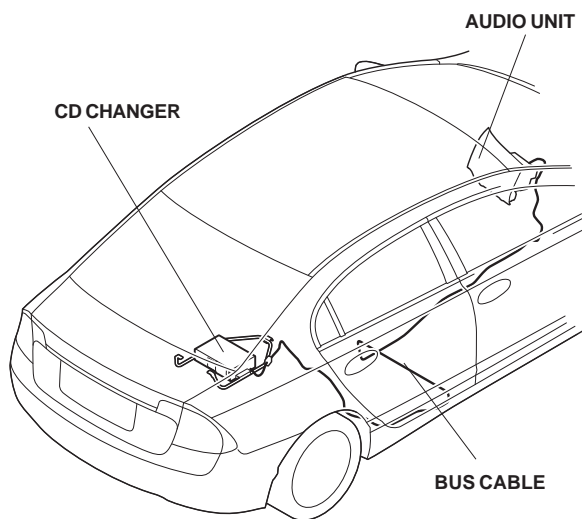


INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your car. These procedures should not be attempted by "do-it-yourselfers."


Removing Parts from the Vehicle

1. Make sure you have the anti-theft code for the audio unit, then write down the frequencies for the preset buttons.
2. Disconnect the negative cable from the battery.


3. Inside the passenger's compartment area, remove the rear seat cushion by removing the bolt and releasing the two hooks.

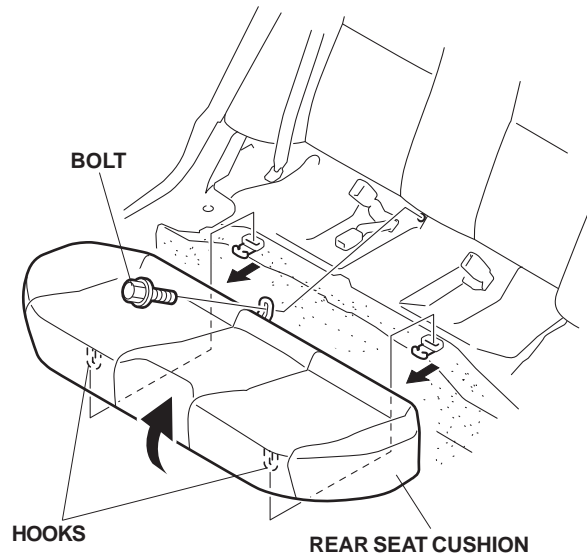


4. Remove the right rear seatback side frame by removing the bolt.

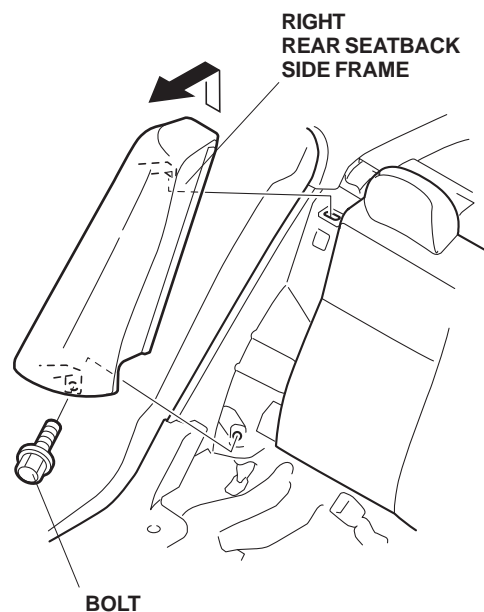


- Open the trunk lid, and remove the trunk floor by removing the two clips.

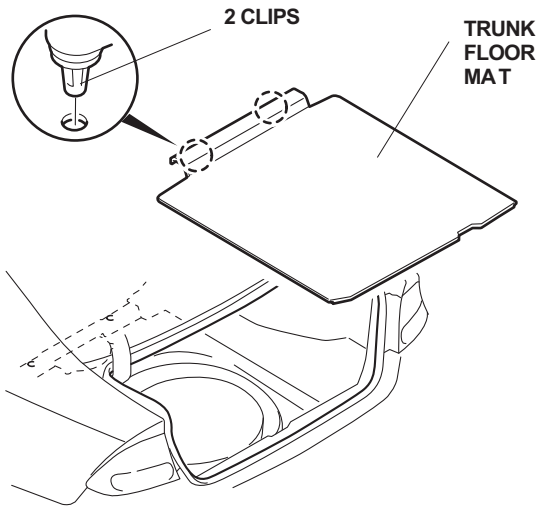

- Remove the trunk weatherstrip from the edge of the trunk opening in the area shown.
- Remove the rear trim panel by removing the four clips and releasing the two hooks.

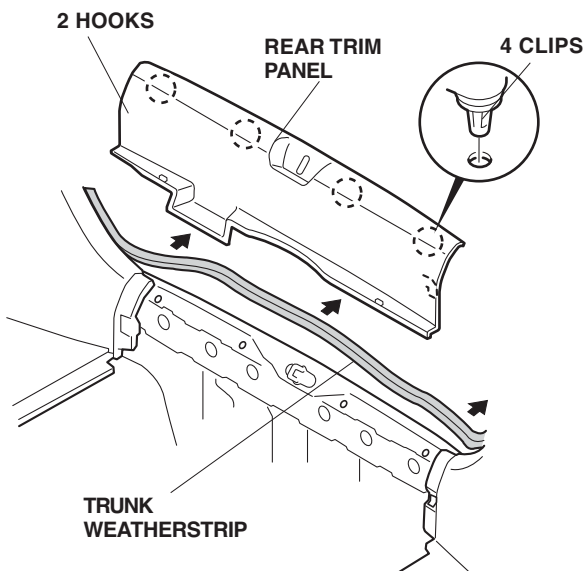


- Inside the trunk, fold the right rear seatback forward by pulling the lever under the rear parcel shelf.
- Continue removing the weatherstrip in the area shown. Remove the five clips, then pull out on the trunk right side trim panel in the direction shown.

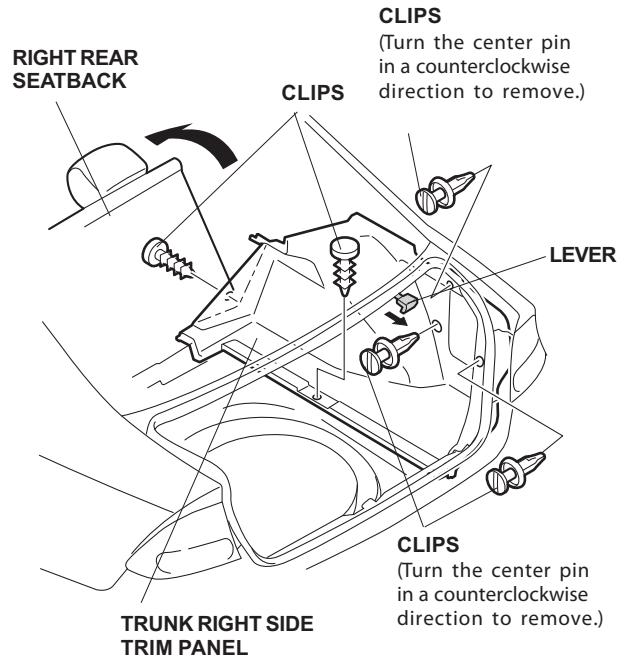


10. Remove the center console cover.

M/T Vehicle

- Pull down on the shift boot, then loosen the fastening nut by turning it clockwise.
- Remove the shift knob by turning it counterclockwise. Remove the fastening nut by turning it counterclockwise.

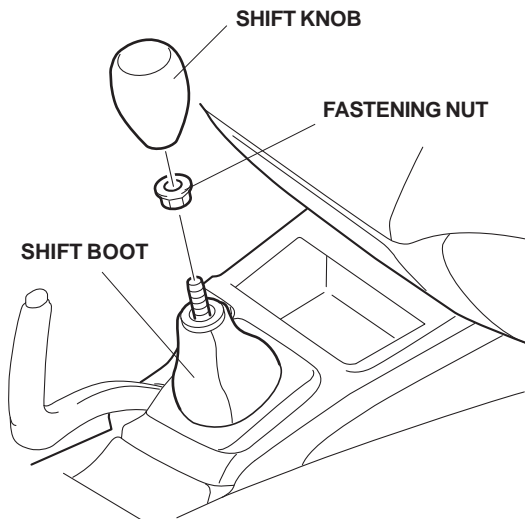


- Remove the center console cover by removing the three clips that fasten the center console cover.

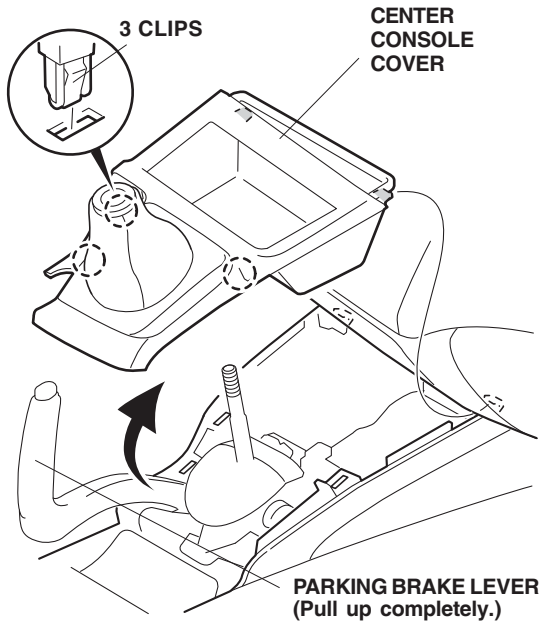


A/T Vehicle


- Remove the center console cover by removing the three clips that fasten the center console cover.

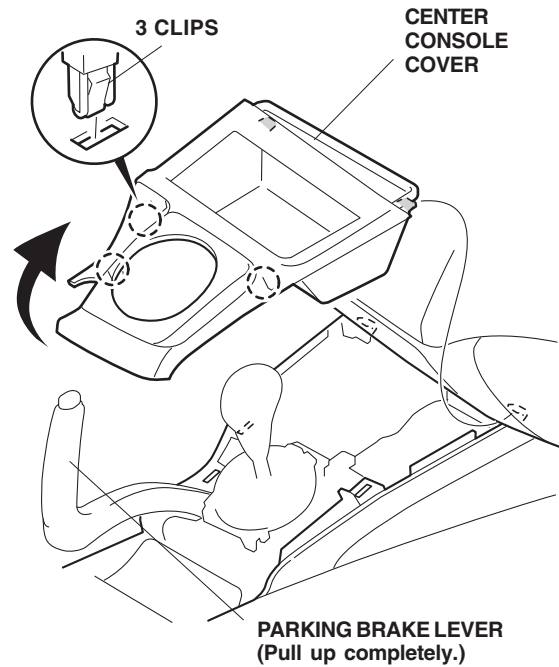


11. Open the center console lid, and remove the mat.
12. Remove the two self-tapping screws, two screws, and two clips that fasten the center console, then remove the center console.

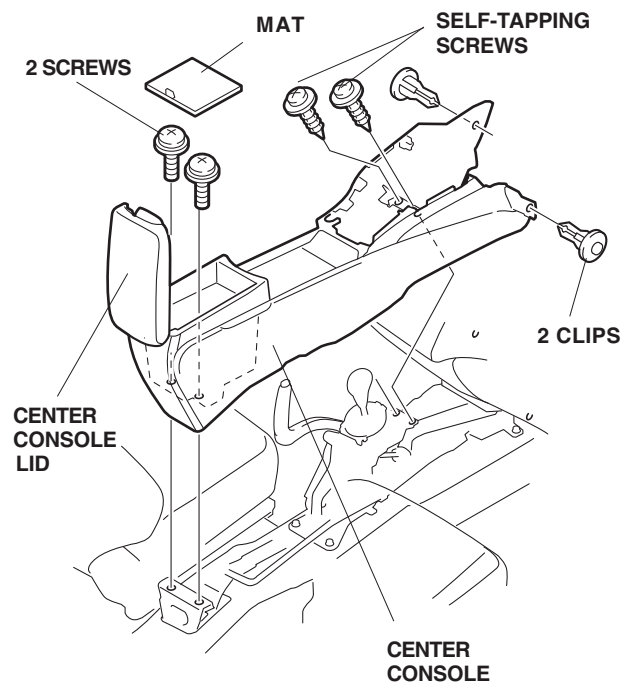


- Turn the knob counterclockwise, release the two clips, and remove the driver's dashboard under cover by lowering the cover and pulling it toward you. Take care not to damage the clips.

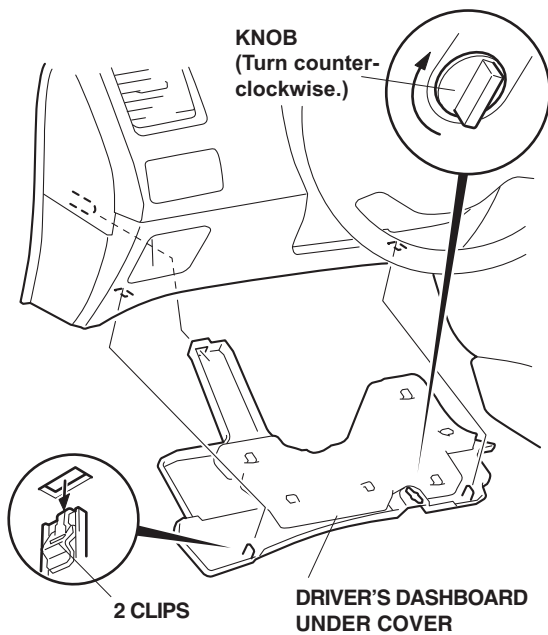


- Release the eight clips, and remove the driver's dashboard lower cover by pulling it toward you. Take care not to damage the clips.

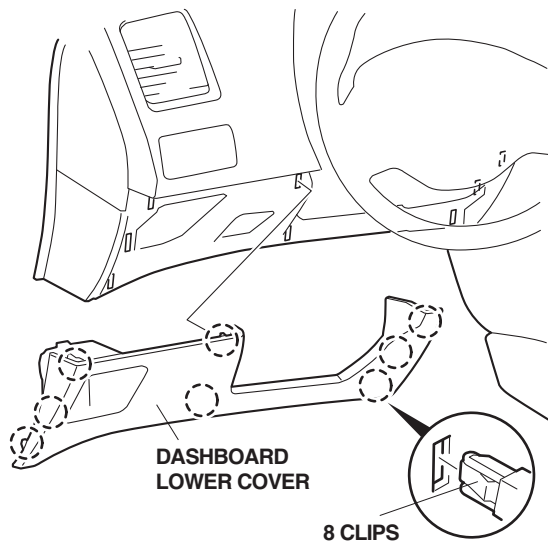


- Release the four clips, and remove the passenger's dashboard under cover by pulling it toward you. Take care not to damage the clips and pins.

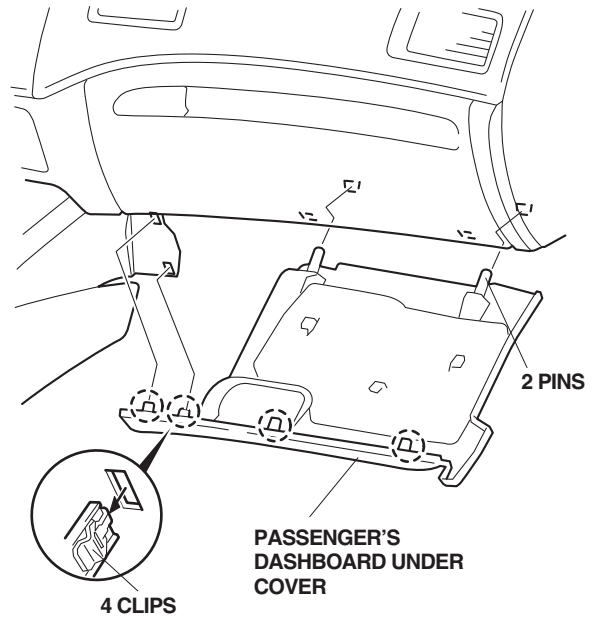

- Release the two hooks and remove the lid above the front console pocket.

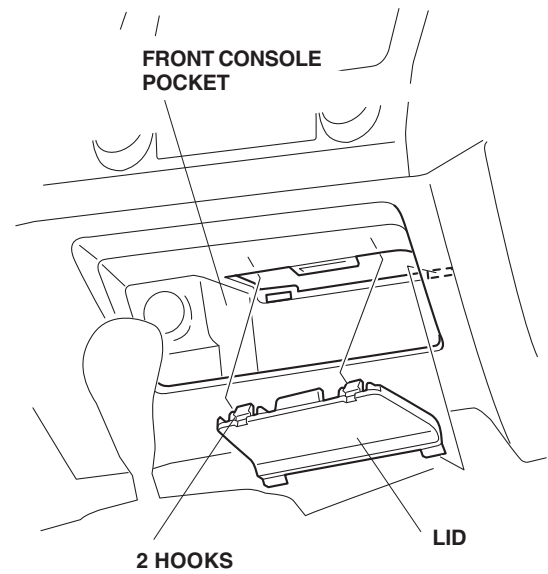


17. Remove the two bolts from the bottom of the center panel.

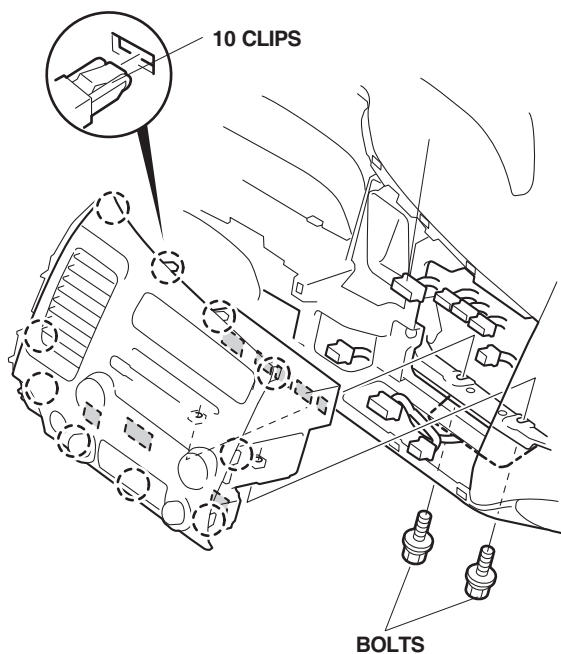


18. Release the ten retaining clips, and pull the center panel toward you.
19. Unplug the vehicle connectors, then remove the center panel.

Routing the Bus Cable

20. Route the bus cable along the vehicle harness.

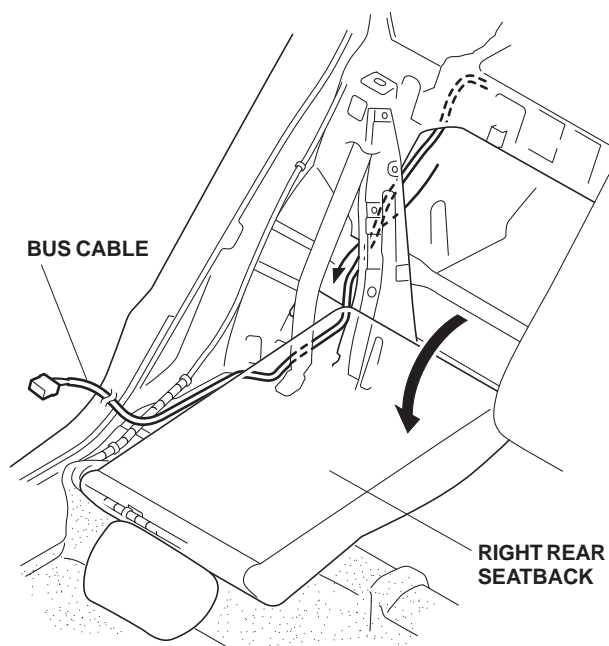


21. Lift up the right rear seatback, then remove the clip securing the floor carpet. Turn over the floor carpet.

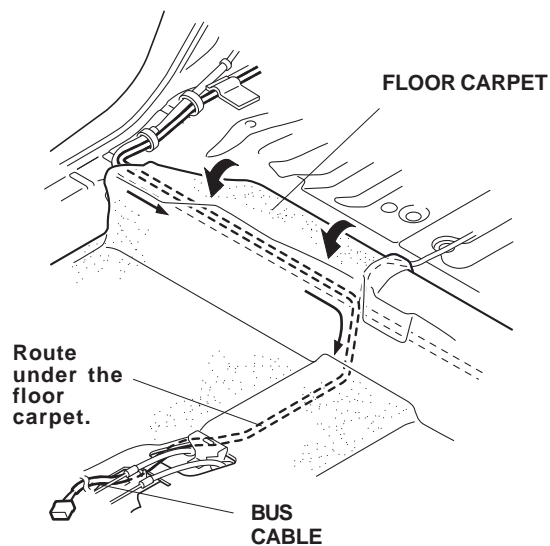


22. Route the bus cable connector as shown.


23. Route the bus cable forward to the right front console frame along the vehicle harness.
24. Route the bus cable connector to the dashboard and out through the dash opening.

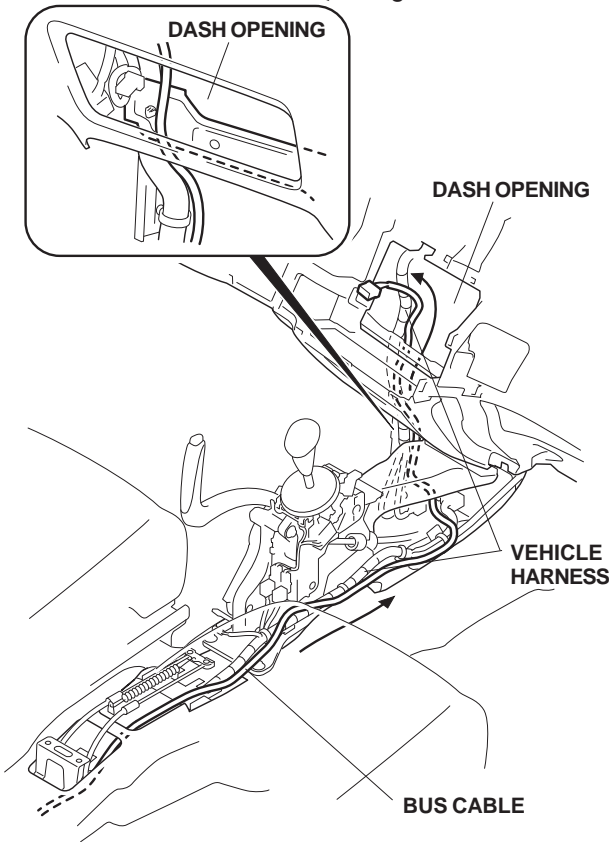

25. Measure 300 mm from the end of the bus cable connector, then secure the bus cable to the vehicle harness with three wire ties.

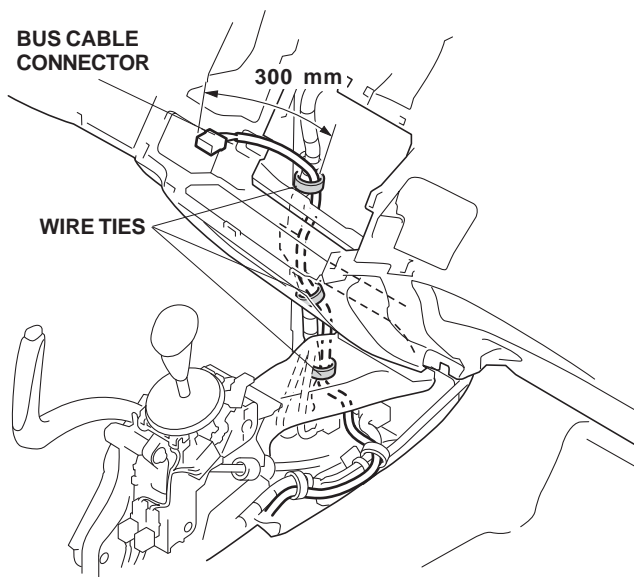


26. Secure the bus cable to the vehicle harness with five wire ties.

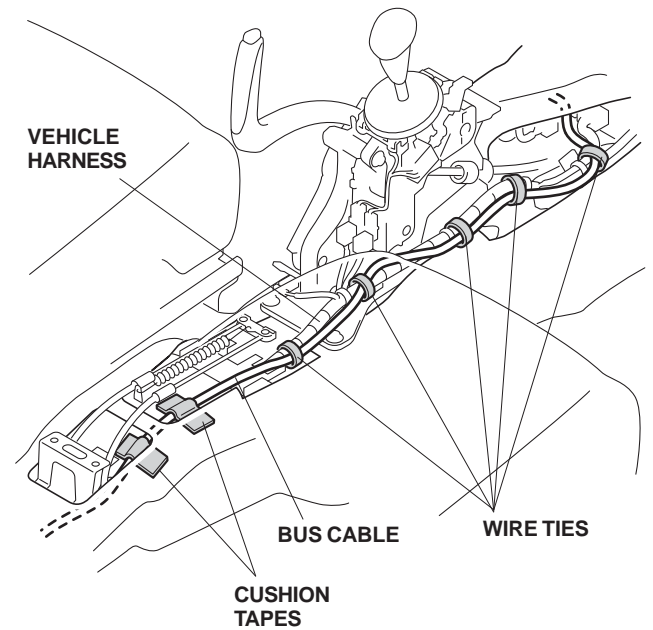


27. Using isopropyl alcohol on a shop towel, clean the area where the cushion tapes will attach. Attach the bus cable to the floor panel with two cushion tapes in the areas shown.

With vehicle bracket

Using isopropyl alcohol on a shop towel, clean the inside of the vehicle bracket where the cushion tape attaches. Attach a cushion tape to the vehicle bracket at the location shown.

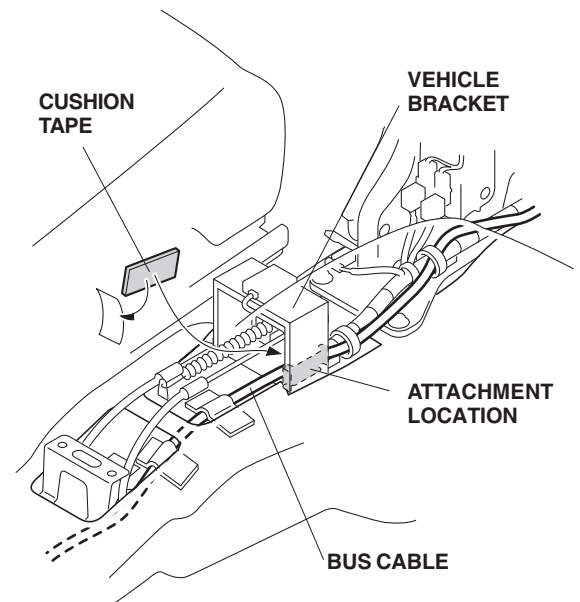


- Pull back the floor carpet, and attach the bus cable to the floor panel with three cushion tapes in the areas shown.

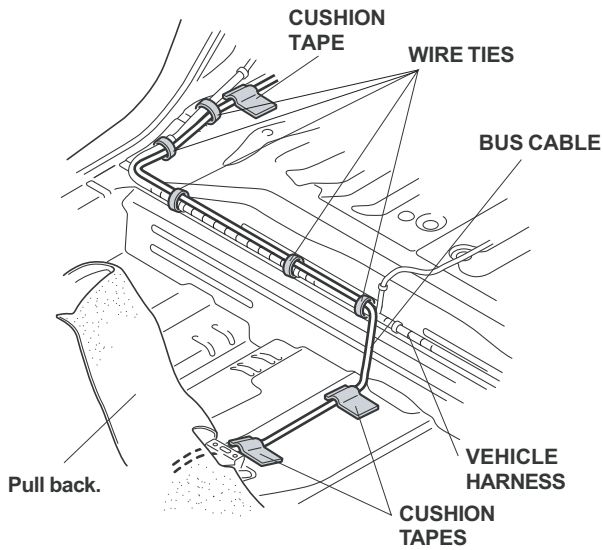


- Secure the bus cable to the vehicle harness with five wire ties in the areas shown.

Installing the CD Changer


- Carefully unpack the CD changer.

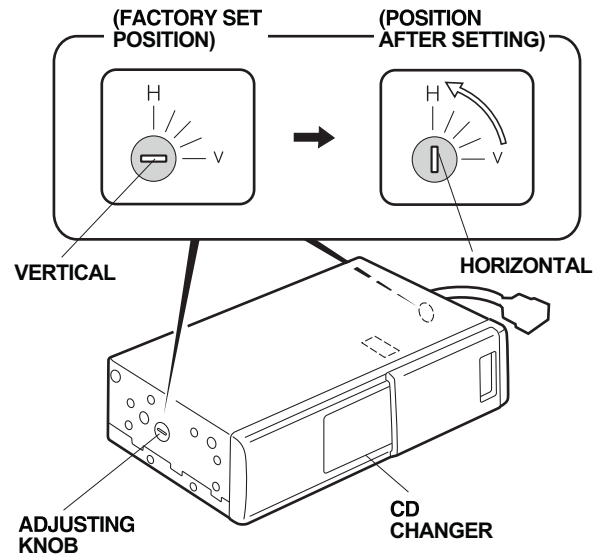


- The adjustment knobs have been set to the vertical (V) position before shipping the CD changer from the factory. Move the adjustment knobs to the horizontal (H) position with a small flat-tip screwdriver.
- Position the CD changer brackets on the sides of the CD changer, then install the four 4 x 8 mm washer-screws.

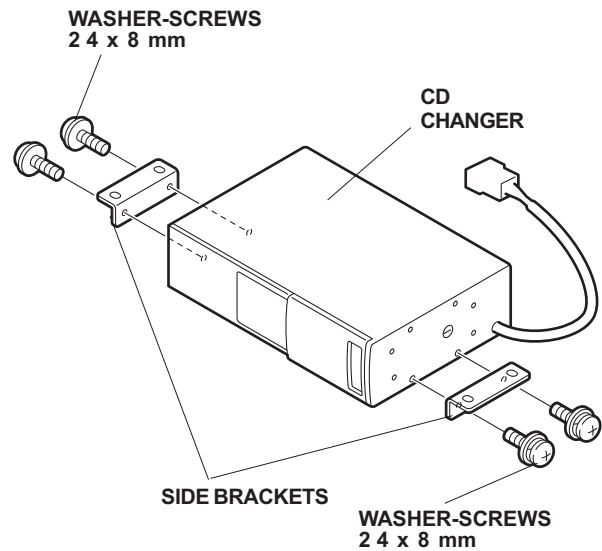

33. Position the CD changer on the CD changer bracket, then install and tighten the four 6 mm flange nuts.

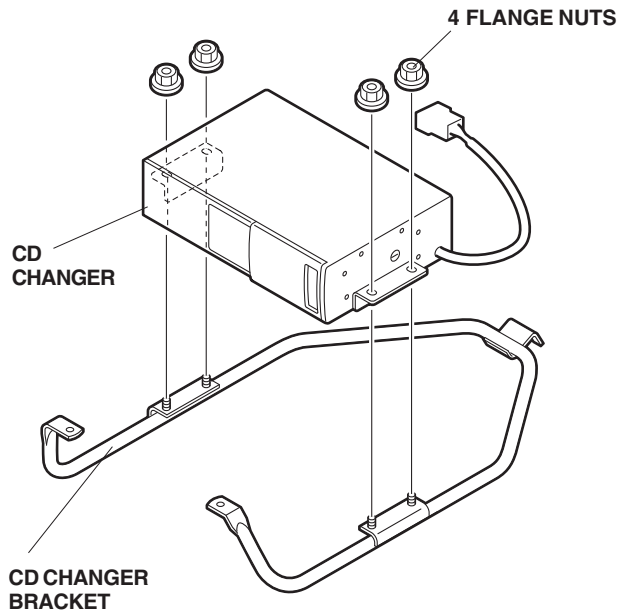


34. Wrap one EPT sealer around the bus cable connector from the CD changer, then secure the bus cable and connector to the CD changer bracket with two wire ties.

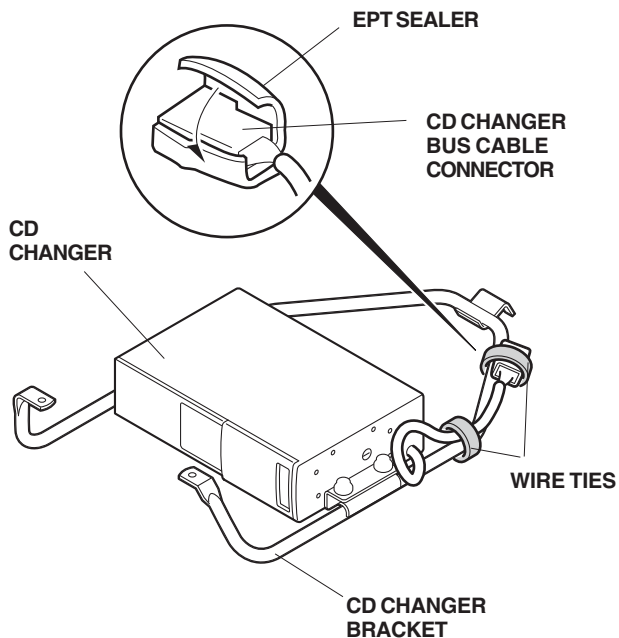


35. In the trunk, slide the clip nut into position on the rear seat panel through the hole in the panel. If necessary, spread the clip nut open with a small flat-tip screwdriver.


36. Loosely install the washer-bolt to the clip nut first. Then place the end of the CD changer bracket between the seat panel and the clip nut you just installed.

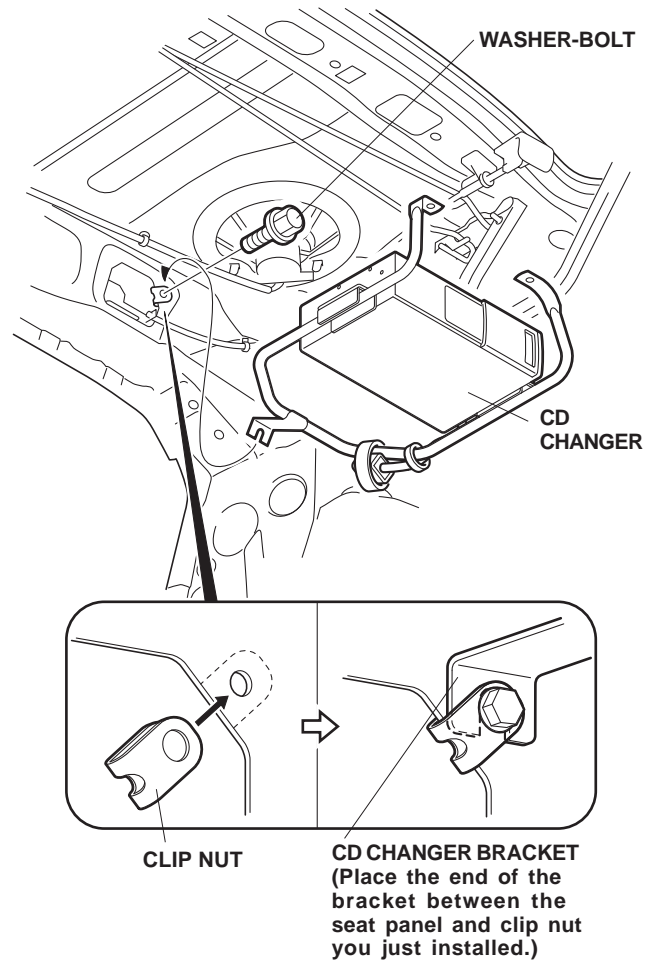


37. Slide two clip nuts onto the CD changer bracket and rear shelf through the holes in the parcel shelf, and align their holes as shown. Install two washer-bolts, and tighten them securely.

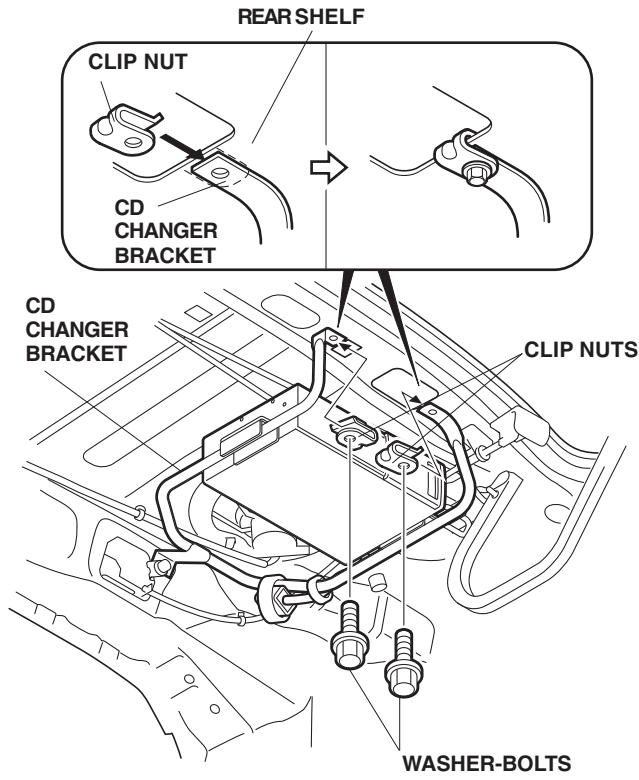

38. Connect the bus cable connector to the CD changer connector.

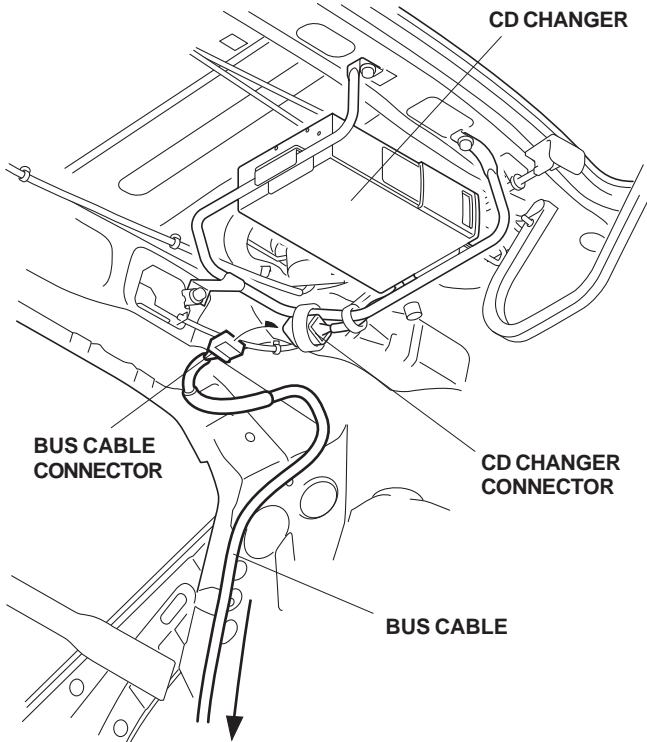


39. Fold the excess bus cable and secure the bus cable to the holes in the rear seat panel with two wire ties with clips.

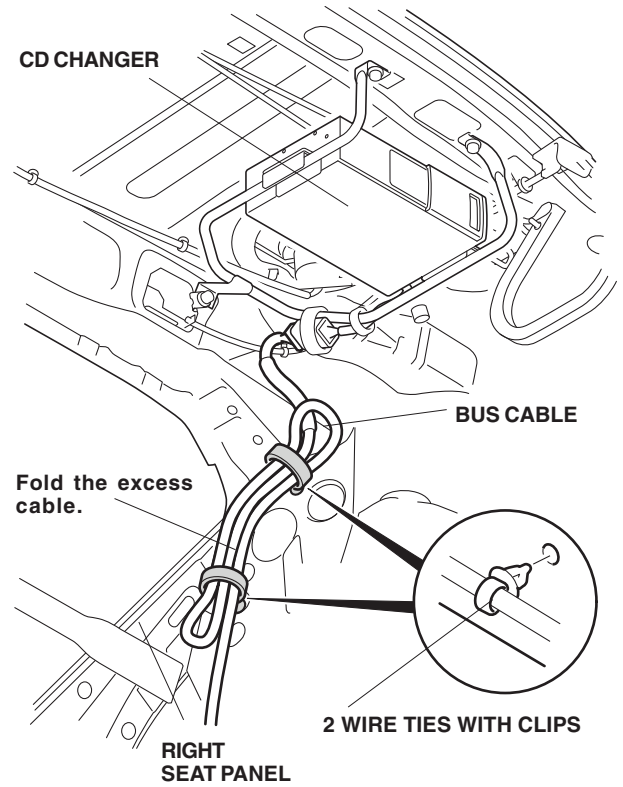


40. Plug the bus cable connector, vehicle 20-pin connector (blue), and antenna lead into the rear of the audio unit.


STANDARD AUDIO UNIT

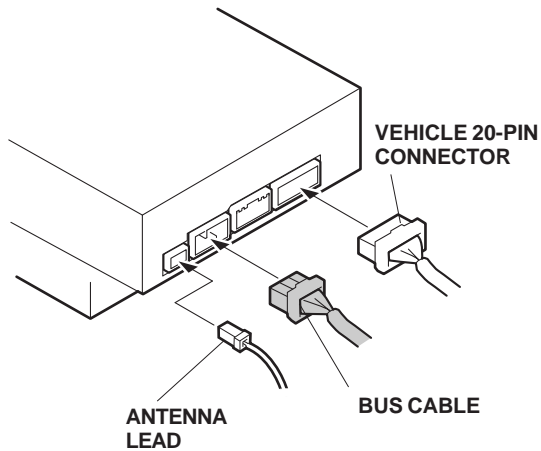


MULTI CONTROL CD TUNER UNIT

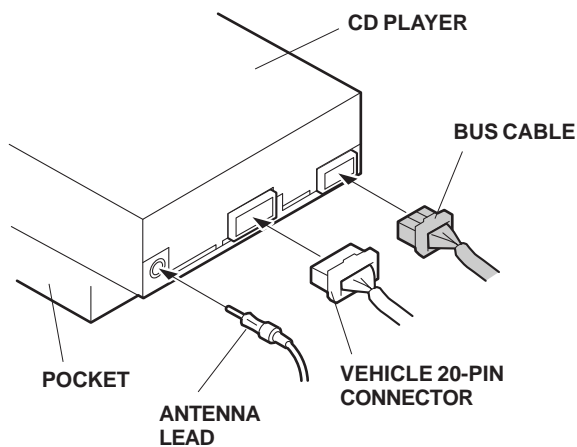

NAVIGATION HEAD UNIT

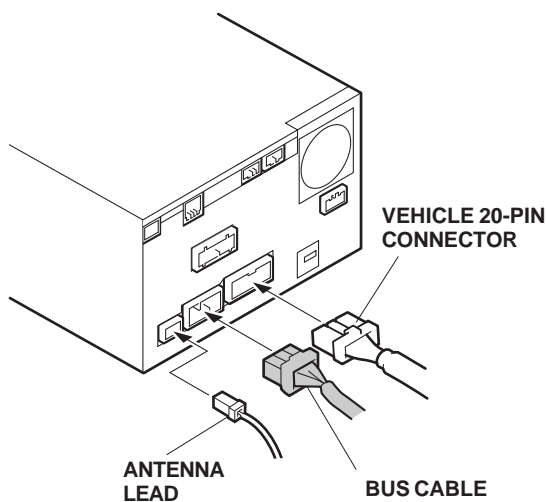

41. Connect the four vehicle connectors to the center panel, and reinstall the center panel.

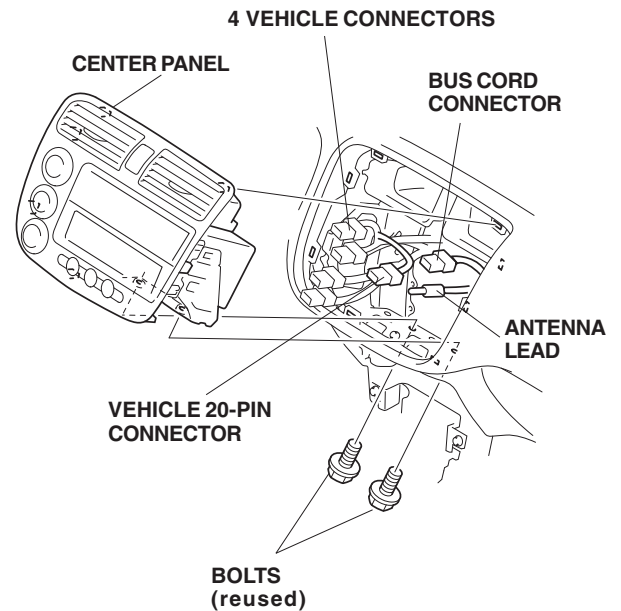

42. Check that all wire harnesses are routed properly and that all connectors are plugged in.
43. Reconnect the negative cable to the battery.
44. Reset the clock and the radio station presets.
45. Check the operation of the CD changer as described in the accessory user's information manual.
46. Reinstall all removed parts. Be sure that all retaining clips and tabs are securely fastened.
47. Put the Accessory User's Information Manual in the glove box for your customer.
48. Initialize and test the front window auto up/down function.