



# INSTALLATION INSTRUCTIONS

Accessory

HALF NOSE MASK  
P/N 08P35-SDN-100

Application

2005 ACCORD  
2-DOOR

Publications No.

All 27597


Issue Date

MAR 2005


Put this information in the glove box with the vehicle owner's manual.

## PARTS LIST


Nose mask

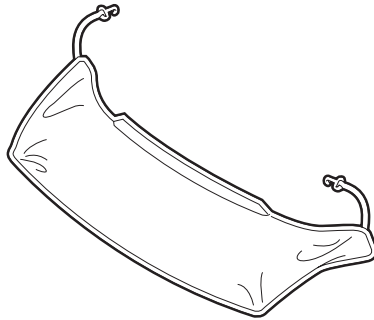

Right fender mask

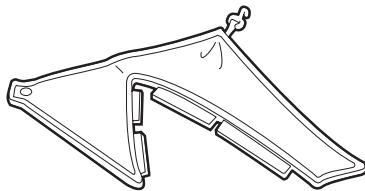

Left fender mask

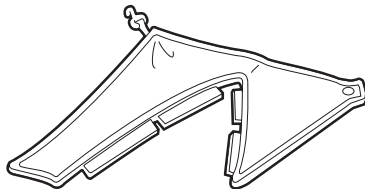

2 Snap-screws



2 Washers



2 Fenderwell nuts



## TOOLS REQUIRED

Stubby #2 Phillips screwdriver

Flat-tip screwdriver


## INSTALLATION

### NOTE:

- Make sure the vehicle and the nose mask are clean and completely dry before installation. If moisture under the mask is allowed to dry, it may cloud the paint. If the mask gets wet, remove it and allow it to air-dry completely.
- Make sure any repainted surfaces are cured.
- Make sure the hood and nose of the vehicle have been waxed with a high-quality paste wax.
- Make sure you install the nose mask securely. If the nose mask starts to flap or comes loose while driving, safely pull off the highway, stop the vehicle, and secure or remove the mask.
- The nose mask cannot be installed on a vehicle equipped with fenderwell trims.

### Installing the Hood Section


1. Open the hood, and remove the two hood insulator clips. (Do not discard the insulator clips; they can be reinstalled if the mask is removed.)

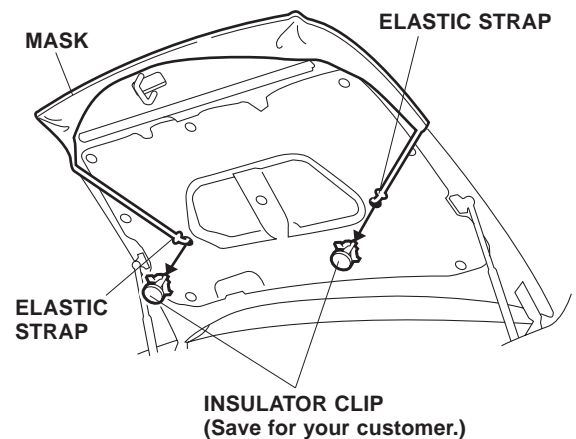

2. Fit the corners of the mask around the hood, and adjust the mask so it fits smoothly over the edges. Secure the mask by hooking the elastic straps into the holes in the hood.


## Installing the Fender Section

3. Turn the steering wheel all the way clockwise.
4. Pry out the plastic pin, and remove the expansion clip that fastens the inner fender to the fender; retain the pin and the clip, then clean the area around the hole.

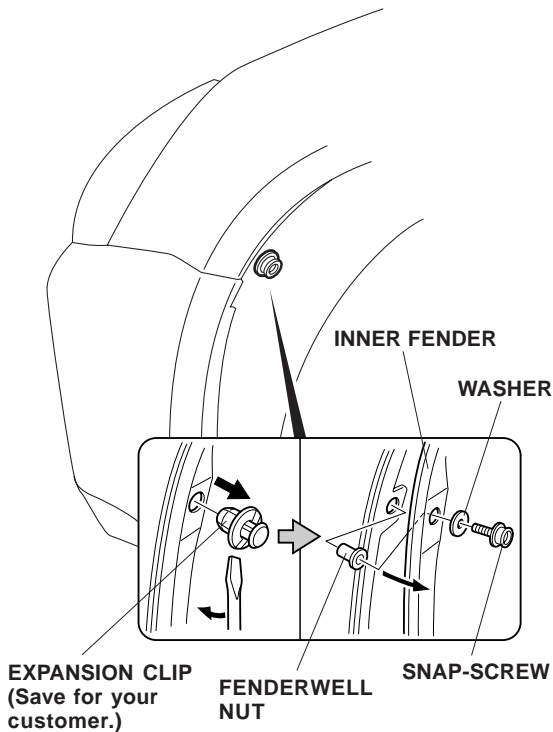


5. Pull the inner fender away, and press one fenderwell nut into the hole in the fender flange.
6. With its washer in place, securely tighten a snap-screw into the fenderwell nut.
7. Turn the steering wheel all the way counterclockwise, and repeat steps 4 thru 6 on the other side of the vehicle.

8. Slip the two pockets of the left fender mask over the corners of the left front fender, and hook the elastic strap to the hole in the fender. It may be necessary to apply downward pressure on the bumper to install the fender pockets. Insert the four tabs between the fender and the headlight.

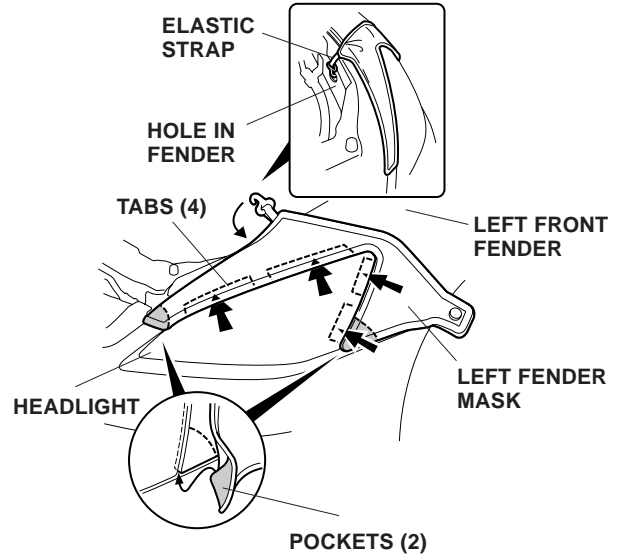

9. Pull the fender mask back toward the wheelwell, smooth out any wrinkles, and snap the fender mask onto the snap-screw.

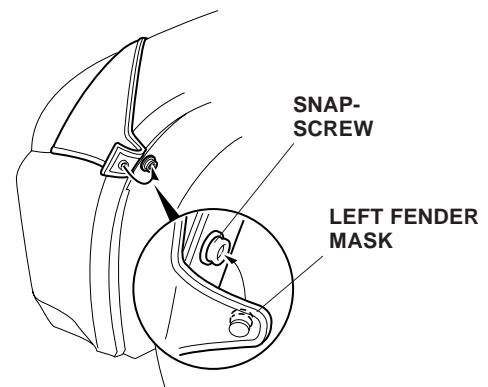

10. Repeat steps 8 and 9 on the other side.
11. Put these instructions, along with the insulator clips (removed in step 1) and the expansion clips (removed in step 4), into the glove box for future use.

## CLEANING THE NOSE MASK

Use a sponge or cloth, and a solution of mild liquid dishwashing soap and water to clean the vinyl and the flannel backing. Rinse the mask completely with clean water, and hang it to dry, out of direct sunlight. Make sure the mask is completely dry before you reinstall it.